




*Transparent Testing &
Simplified Measurement*

Relay Cum Energy Meter Test Kit

SBE - REMT 50
SBE - KEAT 20

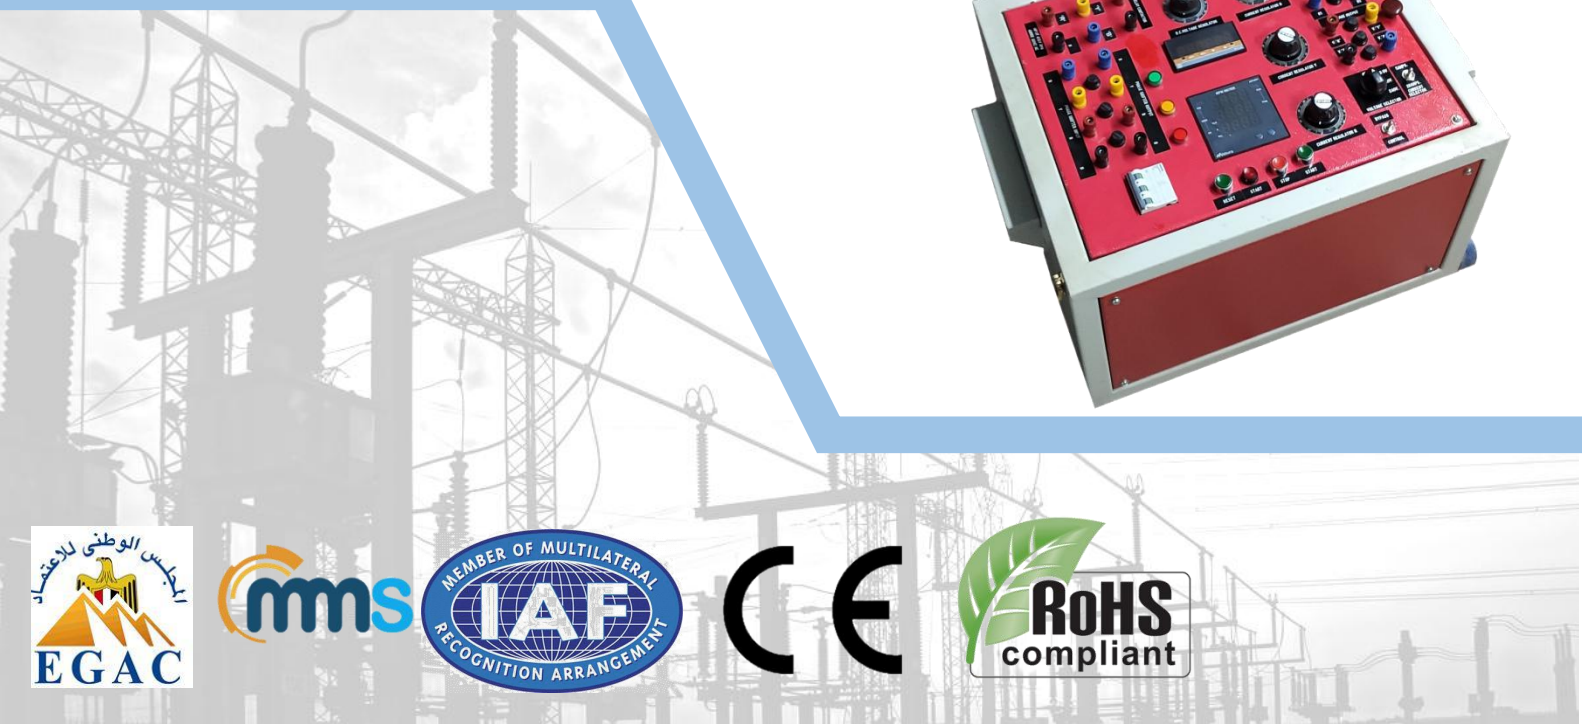



- Three Phase Relay cum Energy Meter Test Set to test, Various types of Relay and Energy Meter
- Test Current is Up-to 50 Ampere
- 1.5% Accuracy
- Capacity : 300 VA Per Phase
- Good Locking, Sturdy Cabinet
- Compact and rugged
- Quick and Easy to operate
- Excellent Weight / Performance Ratio

SPECIAL FEATURES

- Mains ON/OFF MCB
- Mains ON & START Indication
- Three Nos. Digital Ammeter of 1.5% Accuracy
- One No. AC & One No. DC Voltage Regulator is provided
- 1A/5A/25A Selector Switch, 50A Terminal
- Fuse Protection for all O/P Voltage and O/P Current
- Push Button Control Output ON/ OFF & Timer Reset
- Input Terminals R,Y,B & N
- Three Phase Current Output Terminals
- Three Nos. Current Regulator is provided
- By pass / Control Selector Switch
- 0-250 V AC & DC Voltage Source Terminal


STANDARD ACCESSORIES

- Mains Power Cord
- Spare Fuse
- Operating Manual
- Works Test Report
- Warranty Certificate
- Schematic Circuit Diagram

TECHNICAL SPECIFICATION

Input :	415 V, 3-Phase - 4 Wire, 50 Hz, AC	
Three Phase Current Output :	Current Rating (In Amp.)	Open Circuit Voltage (In Volt)
	0 - 1 A	6V/50V
	0 - 5 A	6V/50V
	0 - 25 A	6V
	0 - 50 A	6V
Maximum Capacity :	300 VA Max.	
Duty :	5 Minutes.	
Voltage Output :	AC	DC
Voltage:	0 - 250V	0 - 250V
Capacity :	250 VA	250 VA
Duty :	5 Minutes	
Cooling :	Air Natural Cooled	
Digital Time Interval Meter :		
Range :	0 - 999999 Sec. Auto Range	
Resolution :	1 mS	
Weight & Dimension	Weight :- 70 KG Approx.	Dimension :- 650mm(L)x 450mm(W)x 450mm(H)
Test Lead	2 Nos. 25 sqmm 5 Meter Flexible Copper Cables	
<p>The timer will stop on getting the signal from the relay under test. When the timer stops, the current and voltage output are de-energized. Separate pair of test terminals is provided for Relay trip contact.</p> <p>6 Digit, 7 Segment Display</p> <p>Multi-range: A) 0 - 999999 seconds B) 0 - 9999.99 seconds C) 0 - 999.999 seconds D) 0 - 99Hr. 59 Min. 59Sec. E) 0 - 9999Hr. 59Min. F) 0 - 999999Hr G) 0 - 9999.99ms (millisecond)</p>		
<p># Digital Type Multi Function Meter will be Provided to show Three Phase Current & Voltage. It can show 3 Phase Voltage, 3 Phase Current, KW, KWH, KVA, PF & HZ</p>		

OUR PRODUCT IS SERVING THROUGHOUT THE GLOBE

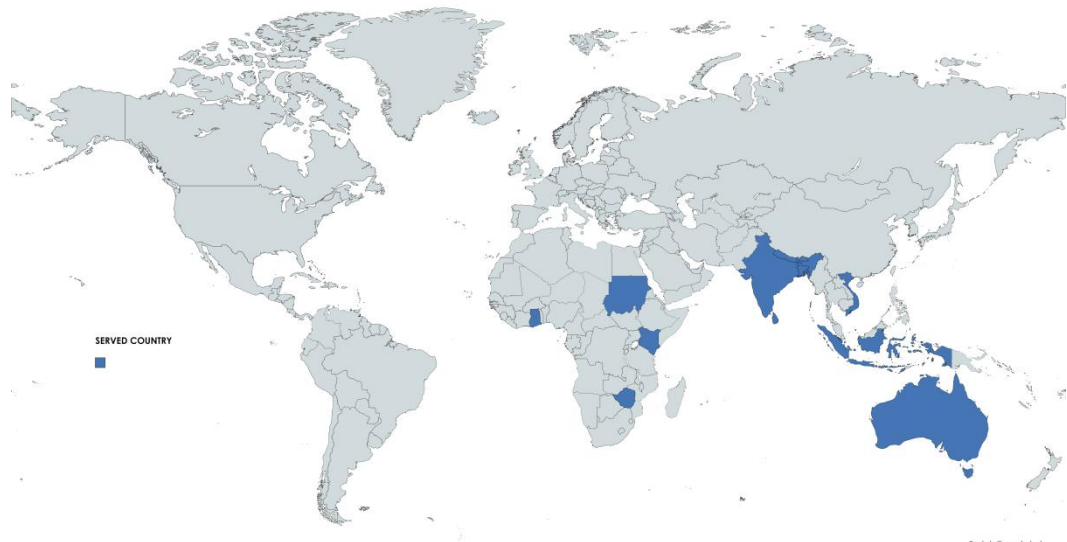

CONNECT WITH US :



SBE FACEBOOK



SBE YOUTUBE



SBE LINKEDIN



*Transparent Testing &
Simplified Measurement*

S.B.ELECTROTECH

124, SIKDAR PARA, RAJPUR, KOLKATA,
ZIP CODE : 700 149, WEST BENGAL, INDIA

Ph. : +91-7278354202 , +91-9477423085

Website : www.sbelectrotech.org

Email Id : info@sbelectrotech.org || sales@sbelectrotech.org

