




*Transparent Testing &
Simplified Measurement*

Primary Current Injection Test Set SBE-PCIC XXXX SBE-ICIC XXXX



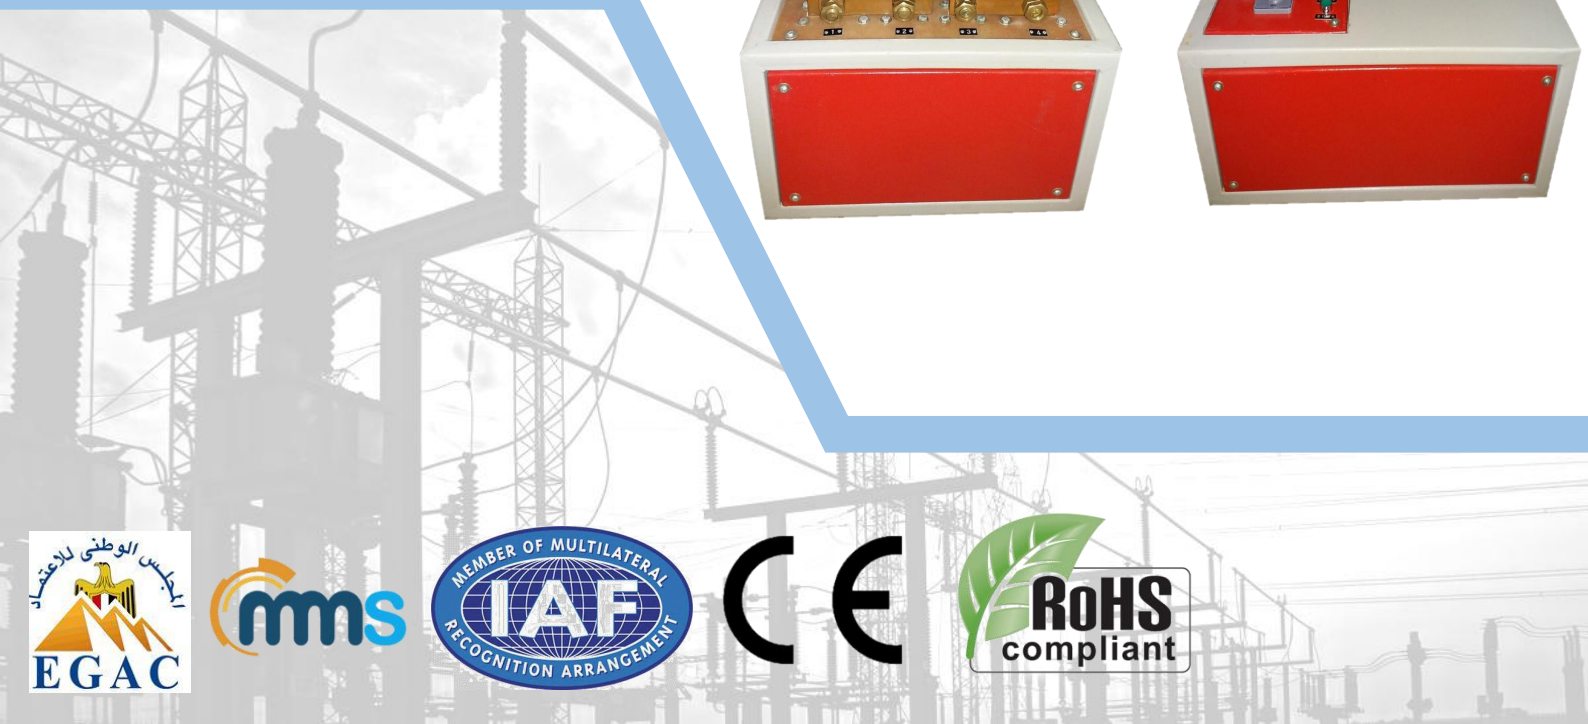

CAPACITY UPTO - 6000 A

- Accuracy is up-to 2 %
- Good Looking Sturdy Cabinet.
- 4½ DIGIT Digital Display.
- Compact and Rugged.
- Quick and Easy to use.
- Excellent Weight / Performance Ratio.
- Suitable to test all types of CT, MCB, Switch gears, Circuit Breaker, Bus-bar, etc.

FEATURES

- Capable to test up-to 6000 Amp
- Available in Manual Mode
- Ammeter for Output Current Measurement
- Digital Time interval meter.
- 4½ Digit Digital Display
- Box type Control Panel
- Over current Protection
- Relay Protection
- HRC Fuse Protection
- Short Circuit Protection
- High Current 'ON' Indication
- Easy Operation

STANDARD ACCESSORIES

- Mains Power Cord
- Works Test Report
- Spare Fuse
- Warranty Certificate
- Operating Manual

OPTIONAL ACCESSORIES

- Digital Time Interval Meter.
- High Current Test Leads. (2 X 3 Meter)


HIGH CURRENT TEST LEAD SPECIFICATION :

FR Insulated Single Core Unheated Industrial Flexible Cable conforming to IS : 694 : 2010 with Flexible Bright Annealed Copper Conductor. Cable stock will be provided as per Current Rating of the Panel.

SPECIFICATION

MODEL	SBE - PCI 1000	SBE - PCI 1500	SBE - PCI 2000	SBE - PCI 2500	SBE - PCI 3000	SBE - PCI 4000	SBE - PCI 5000	SBE - PCI 6000
Output Current :	0 - 1000 A	0 - 1500 A	0 - 2000 A	0 - 2500 A	0 - 3000 A	0 - 4000 A	0 - 5000 A	0 - 6000 A
O.C Voltage :	5 V	5 V	5 V	5 V	5 V	5 V	5 V	5 V
Burden :	5000 VA	7500 VA	10000 VA	12500 VA	15000 VA	20000 VA	25000 VA	30000 VA
Accuracy :	± 1.5 % of Reading. ± 2 Digit.							
Resolution :	1 Amp.							
Mains Supply :	230 V, SINGLE PHASE / 400 V, (TWO PHASE WITH NEUTRAL) AC, 50 Hz, ±10 %							
Operation :	Manual							
Duty Cycle :	Intermittent (5 Minutes On, 10 Minutes Off) (Can be done as per customer's requirement)							
Timer (Optional) :	0.0001 to 9999 Sec Auto ranging, timer with trip circuit. (Accuracy : ± 0.05 ± 1 Count.)							
Operating Temp :	0 °C to +55 °C							
Storage & Transport :	0 °C to +70 °C							
Protection :	Zero Start Interlock, HRC Fuse, Overload Protection, Short circuit Protection							
Unit :	3 (i.e. Control Unit, Loading Transformer Unit, Variable Auto Transformer Unit)							
Standard Output Cable (Optional) :	190mm ² 6 mtr.	300 mm ² 6 mtr.	370 mm ² 6 mtr.	480 mm ² 6 mtr.	555 mm ² 6 mtr.	740 mm ² 6 mtr.	925 mm ² 6 mtr.	1110 mm ² 6 mtr.

OUR PRODUCT IS SERVING THROUGHOUT THE GLOBE

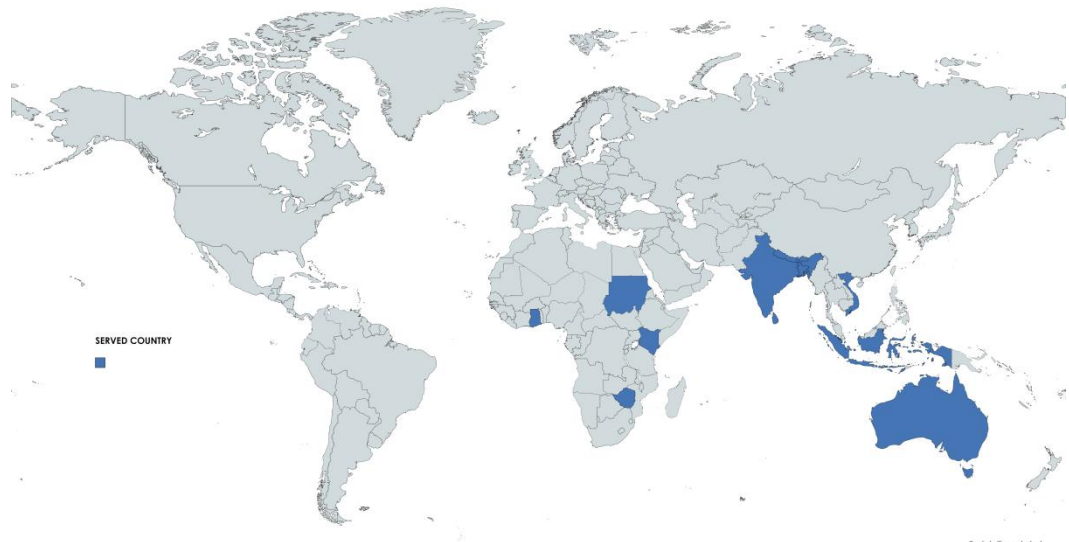

CONNECT WITH US :



SBE FACEBOOK



SBE YOUTUBE



SBE LINKEDIN



*Transparent Testing &
Simplified Measurement*

S.B.ELECTROTECH

124, SIKDAR PARA, RAJPUR, KOLKATA,
ZIP CODE : 700 149, WEST BENGAL, INDIA

Ph. : +91-7278354202 , +91-9477423085

Website : www.sbelectrotech.org

Email Id : info@sbelectrotech.org || sales@sbelectrotech.org

