



*Transparent Testing &
Simplified Measurement*

Micro OHM Meter

SBRM-10





FEATURES

- True Four Terminal Measurement Technique eliminates lead resistance natural errors in 2 wire measurement.
- Regulated and Highly Stable 10 Amp Current Source.
- 4½ Digit LED / LCD Display.
- 0.1 $\mu\Omega$ Resolution on 2 m Ω range.
- Protection against Back E.M.F for high Inductive Loads.
- Stable & Fast Measurement.

APPLICATION FIELD

- Communication Cable.
- Instrumentation Cable.
- Transformer, Motors, Coil Manufacturing.
- Transmission and Distribution.
- Component Manufacturing.
- Current Transformer Manufacturing.
- Test Laboratories.
- College Laboratories.

TECHNICAL SPECIFICATION


RANGE	MAX. RADING	CURRENT	RESOLUTION	ACCURACY
2 m Ω	1.9999 m Ω	10 A	0.1 $\mu\Omega$	$\pm 0.5\%$ of rdg ± 5 Digit
20 m Ω	19.999 m Ω	1 A	1 $\mu\Omega$	$\pm 0.5\%$ of rdg ± 5 Digit
200 m Ω	199.99 m Ω	1 A	10 $\mu\Omega$	$\pm 0.5\%$ of rdg ± 5 Digit
2000 m Ω	1.9999 Ω	100 mA	100 $\mu\Omega$	$\pm 0.5\%$ of rdg ± 5 Digit
20 Ω	19.999 Ω	10 mA	1 m Ω	$\pm 0.5\%$ of rdg ± 5 Digit
200 Ω	199.99 Ω	1 mA	10 m Ω	$\pm 0.5\%$ of rdg ± 5 Digit
2000 Ω	1999.9 Ω	0.1 mA	0.1 m Ω	$\pm 0.5\%$ of rdg ± 5 Digit
POWER SUPPLY :		230 V AC, 50 Hz, Single Phase.		

STANDARD ACCESSORIES

- One Set of Test Leads(1 Meters) with Crocodile Clip.
- Mains Power Cord.
- User Manual.



OUR PRODUCT IS SERVING THROUGHOUT THE GLOBE

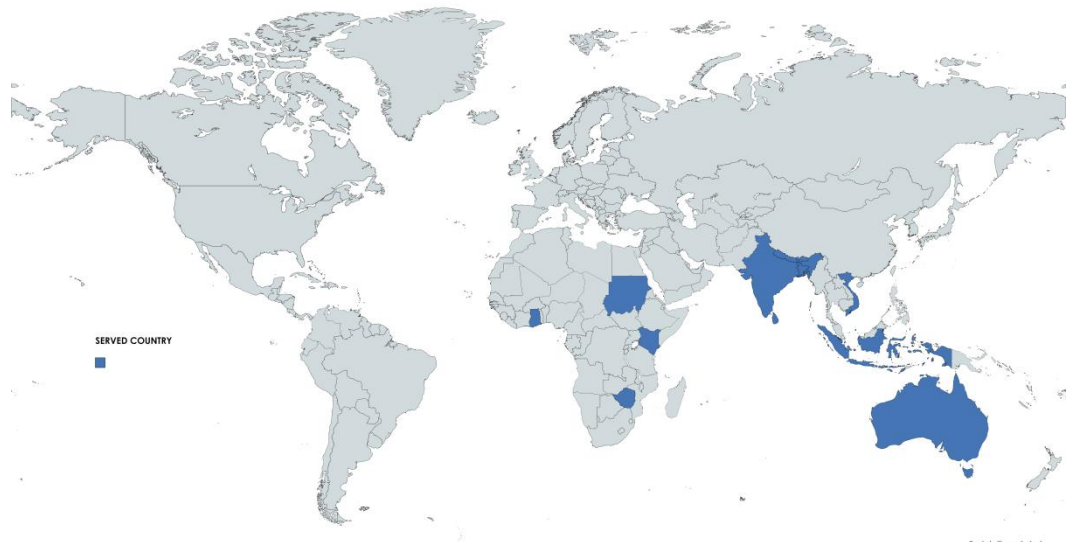

CONNECT WITH US :



SBE FACEBOOK



SBE YOUTUBE



SBE LINKEDIN



*Transparent Testing &
Simplified Measurement*

S.B.ELECTROTECH

124, SIKDAR PARA, RAJPUR, KOLKATA,
ZIP CODE : 700 149, WEST BENGAL, INDIA

Ph. : +91-7278354202 , +91-9477423085

Website : www.sbelectrotech.org

Email Id : info@sbelectrotech.org || sales@sbelectrotech.org

